


H06 – Narrow Slotted Cable Duct

DATASHEET

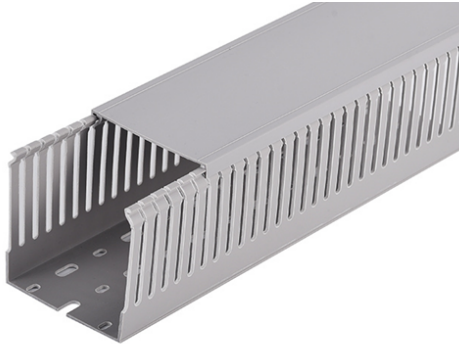


Description

TRICAB's Narrow Slotted Cable Ducts are used to organize wiring horizontally and vertically inside control systems are distribution electrical enclosures. They have a smaller slot as well as thinner fingers.

The ducts allow cable ties to pass through the lateral perforations at the base to clamp cables.

Lids Included.

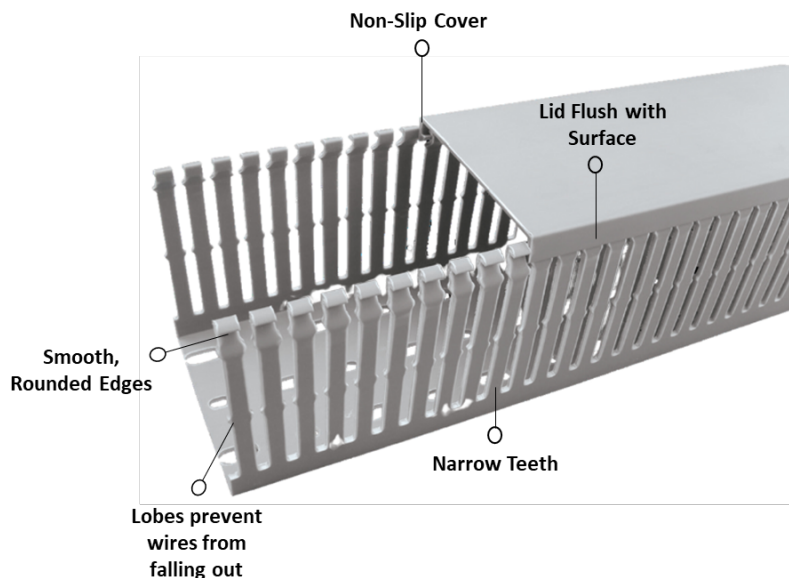

Advantages

- Rigid, high-quality construction
- UL94 Flammability Rating of V-0
- Non-slip lining secures the cover in place

Materials:

- PVC

Operating Temperature

- -40°C to +65°C
- -40°F to +149°F


Inspection and Testing

- Visual inspection
- Physical measurement
- Cable Fitting Test

Certifications


- UL
- ROHS
- REACH

Specification

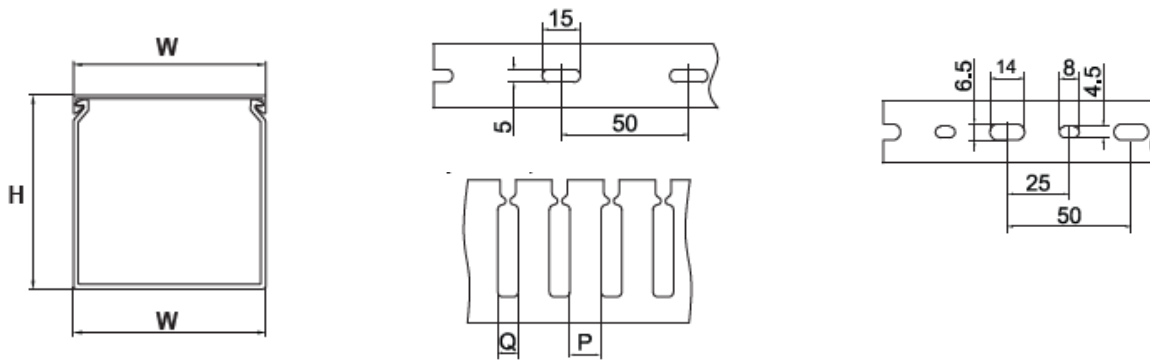

16-75mm Width

Product Code	Width (W)	Height (H)	Slot Width (Q)	Finger Width (P)	Length	Box Quantity
	mm	mm	mm	mm	m	
H06-A9XX/25G40	25	40	4	6	2	56
H06-A8XX/25G60	25	60	4	6	2	50
H06-A7XX/25G80	25	80	4	6	2	36
H06-ALXX/25G100	25	100	4	6	2	30
H06-A8XX/40G40	40	40	4	6	2	50
H06-A7XX/40G60	40	60	4	6	2	36
H06-A5XX/40G80	40	80	4	6	2	24
H06-A4XX/40G100	40	100	4	6	2	22
H06-A6XX/60G40	60	40	4	6	2	34
H06-A5XX/60G60	60	60	4	6	2	24
H06-A2XX/60G80	60	80	4	6	2	16
H06-A2XX/60G100	60	100	4	6	2	16
H06-AHXX/75G50	75	50	4	6	2	20
H06-A1XX/75G75	75	75	4	6	2	12

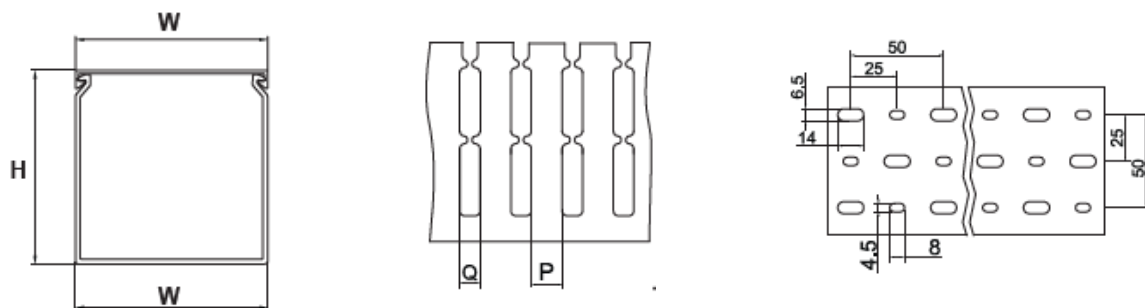

80-100mm Width

Product Code	Width (H)	Height (W)	Slot Width (Q)	Finger Width (P)	Length	Box Quantity
	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>m</i>	
H06-A3XX/80G60	80	60	4	6	2	18
H06-A1XX/80G80	80	80	4	6	2	12
H06-A1XX/80G100	80	100	4	6	2	12
H06-A1XX/100G80	100	80	4	6	2	12
H06-A1XX/100G100	100	100	4	6	2	12
H06-AJXX/120G80	120	80	4	6	2	8
H06-AJXX/150G100	150	100	4	6	2	8

Notes:

- Tricab is not liable for any errors, omissions, etc., and reserves the right to modify the specifications at any time.
- All information above is intended for use only as a guide.