


H01 – Slotted Cable Duct

DATASHEET

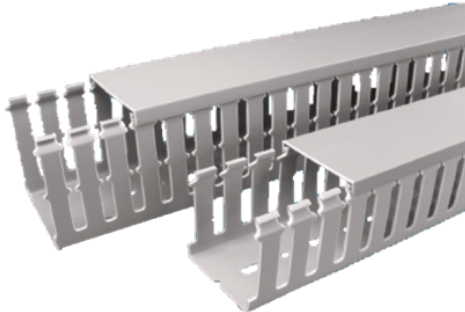

Description

TRICAB's Slotted Cable Ducts are used to organize wiring horizontally and vertically inside control systems are distribution electrical enclosures.

The ducts allow cable ties to pass through the lateral perforations at the base to clamp cables.

Advantages

- Rigid, high-quality construction
- UL94 Flammability Rating of V-0
- Non-slip lining secures the cover in place

Materials:

- PVC

Operating Temperature


- -40°C to +65°C
- -40°F to +149°F

Inspection and Testing


- Visual inspection
- Physical measurement
- Cable Fitting Test

Certifications

- UL
- ROHS
- REACH

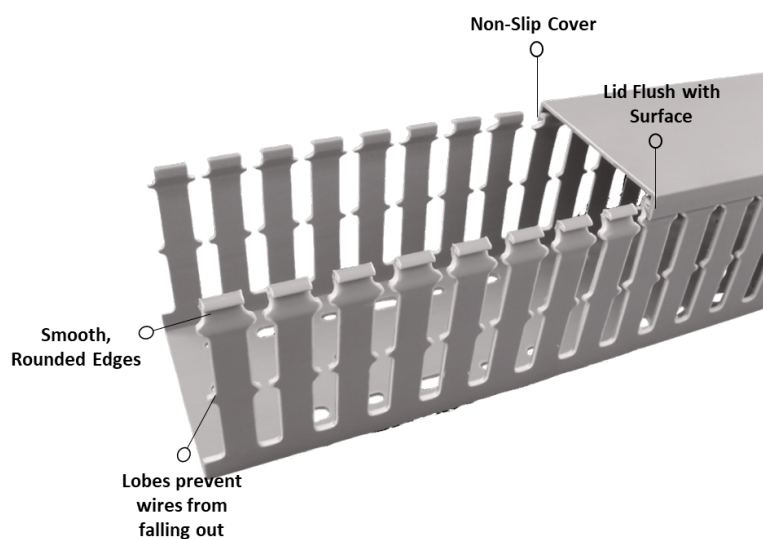


Specification

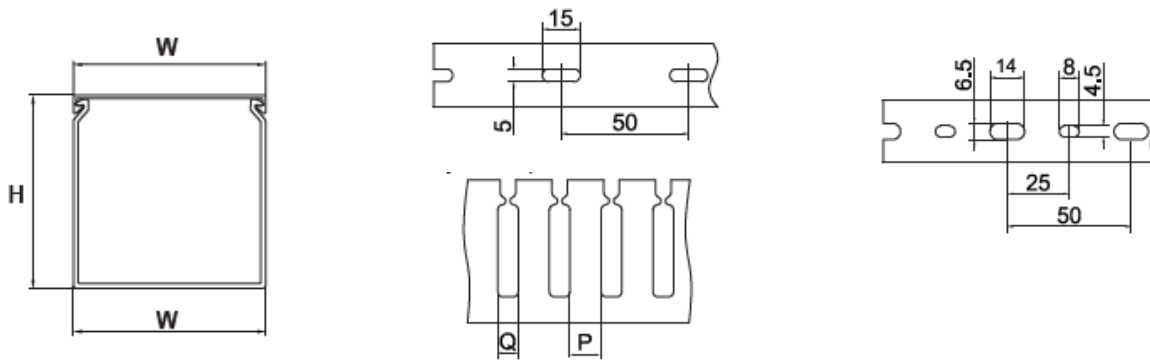

25-60mm Width

Product Code	Width (W)	Height (H)	Slot Width (Q)	Finger Width (P)	Length	Box Quantity
	mm	mm	mm	mm	m	
H01-AVXX/25G25	25	25	8	12	2	60
H01-A8XX/25G30	25	30	8	12	2	50
H01-A9XX/25G40	25	40	8	12	2	56
H01-A8XX/25G60	25	60	8	12	2	50
H01-A7XX/25G80	25	80	8	12	2	36
H01-A8XX/35G35	35	35	8	12	2	50
H01-A8XX/40G40	40	40	8	12	2	50
H01-A7XX/40G60	40	60	8	12	2	36
H01-A5XX/40G80	40	80	8	12	2	24
H01-A4XX/40G100	40	100	8	12	2	22
H01-AWXX/50G35	50	35	8	12	2	44
H01-A6XX/60G40	60	40	8	12	2	34
H01-A5XX/60G60	60	60	8	12	2	24
H01-A2XX/60G80	60	80	8	12	2	16
H01-A2XX/60G100	60	100	8	12	2	16

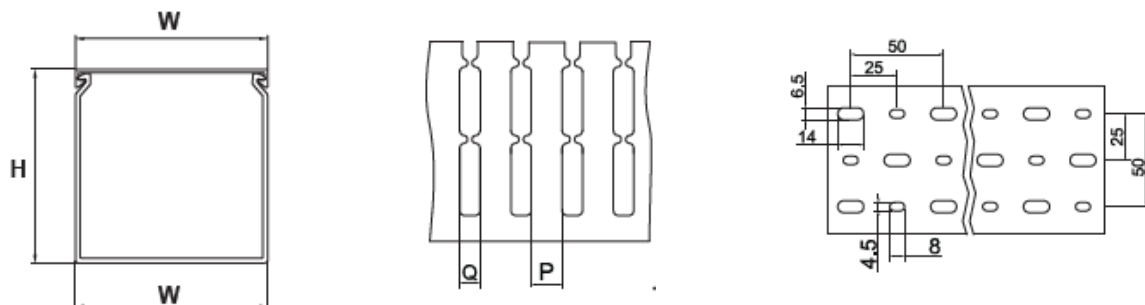

80-150mm Width

Product Code	Width (H)	Height (W)	Slot Width (Q)	Finger Width (P)	Length	Box Quantity
	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>m</i>	
H01-A5XX/80G40	80	40	8	12	2	24
H01-AHXX/80G50	80	50	8	12	2	20
H01-A3XX/80G60	80	60	8	12	2	18
H01-A1XX/80G80	80	40	8	12	2	12
H01-A1XX/80G100	80	60	8	12	2	12
H01-AUXX/100G50	100	50	8	12	2	14
H01-A1XX/100G75	100	75	8	12	2	12
H01-A1XX/100G80	100	80	8	12	2	12
H01-A5XX/100G100	100	40	8	12	2	24
H01-AJXX/120G80	120	80	8	12	2	8
H01-AJXX/150G100	150	100	8	12	2	8

Notes:

- Tricab is not liable for any errors, omissions, etc., and reserves the right to modify the specifications at any time.
- All information above is intended for use only as a guide.